


ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2017.03.17	首次发行	吴昌华
X1	2017.04.22	按要求修订	吴昌华

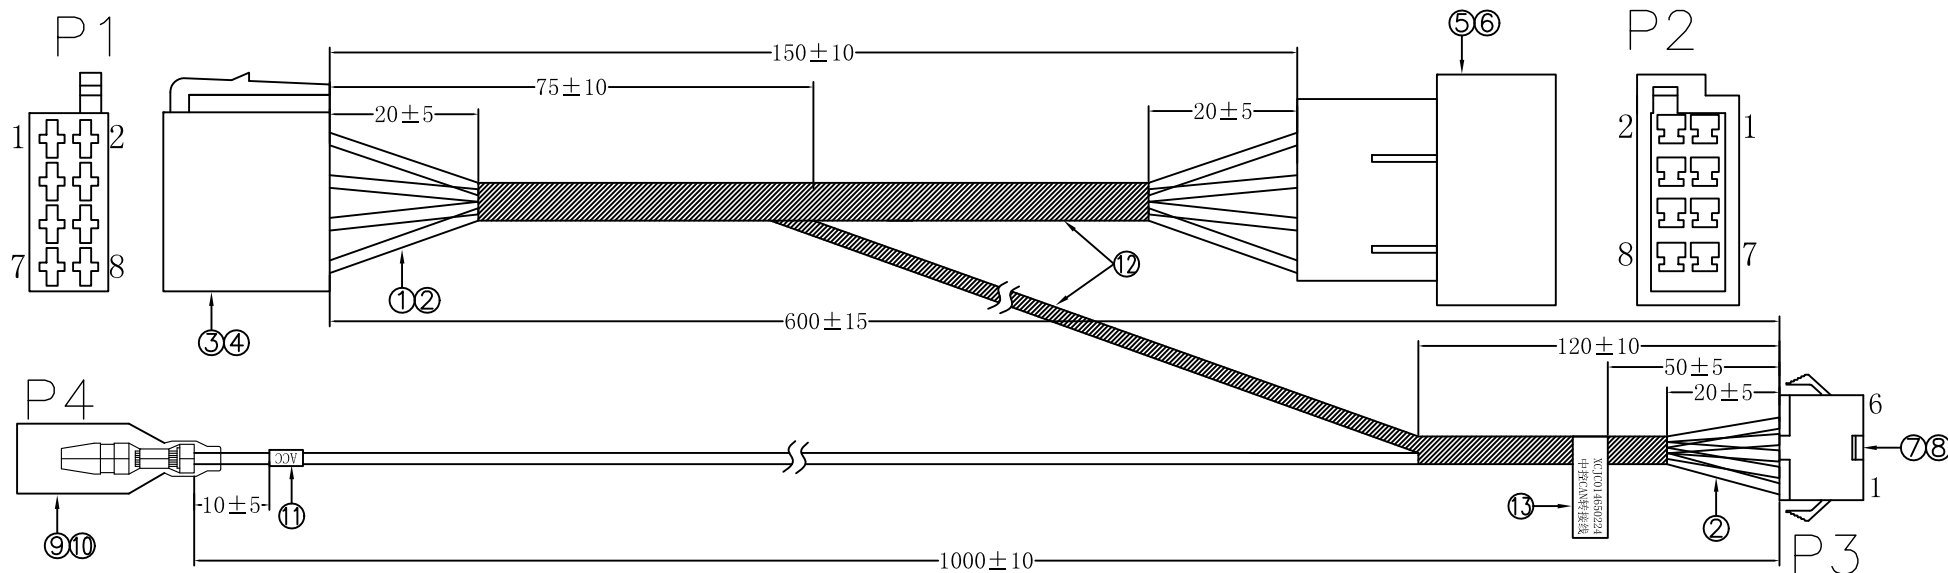


⑥	HSG	3.5mm-2*4P 母HOUSING 材质:PA66 黑色	1PCS	
⑤	TER	3.50mm铆压型端子	8PCS	
④	HSG	3.5mm-2*4P 母HOUSING 材质:PA66 黑色	1PCS	
③	TER	3.50mm铆压型端子	8PCS	
②	线材	UL1430 22AWG INSULATION: PVC OD:1.58mm COLOR:红,白,绿,黑,橙,棕	11PCS	
①	线材	UL1430 20AWG INSULATION: PVC OD:1.76mm COLOR:红,黑	2PCS	
ITEM	TITLE	SPECIFICATION	Q' TY	CHIN-BAN P/N

DRAWING:
吴昌华
2017.03.17

CHECKED:

APPROVAL:

TOLERANCE
.X:=±0.50
.XX:=±0.30
.XXX:=±0.10
.X':=±2'



UNIT: mm


SCALE:N/A

SHEET:1/2



CHIN-BAN
electronics (H.K) co., ltd

DESCRIPTION:	转接线
CUSTOMER:	REV: X1
CUSTOMER P/N:	DEF. UK
DRAWING NO: A-HSHS-16EQ-J163	SIZE:A4

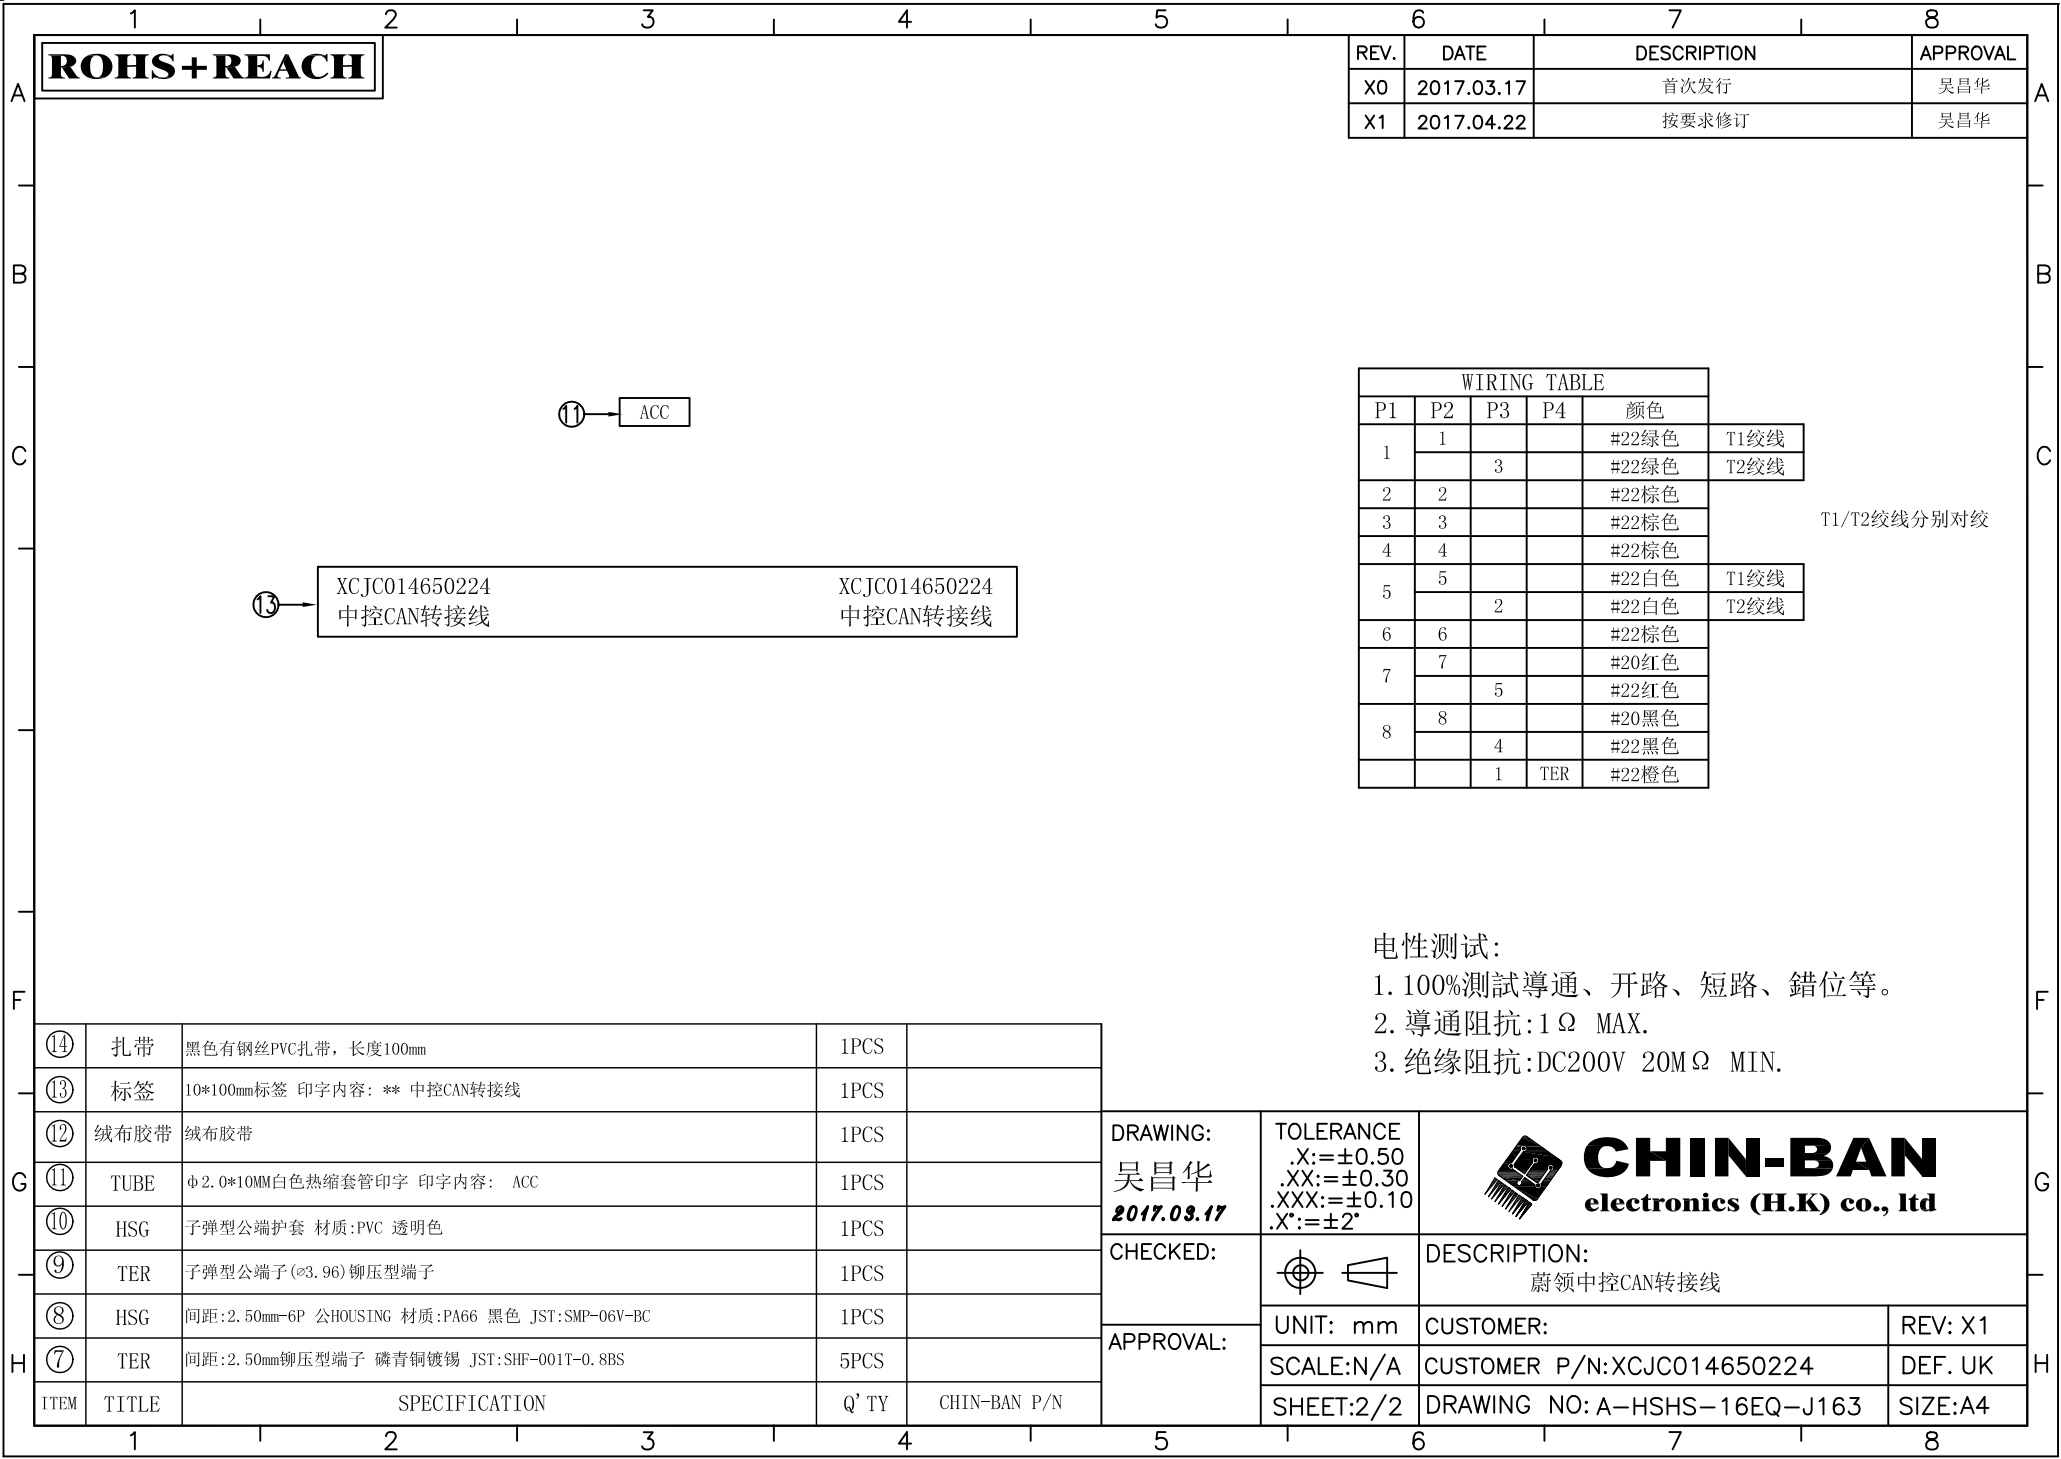

电性测试：

1. 100%测试导通、开路、短路、错位等。

2. 导通阻抗:1Ω MAX.

3. 绝缘阻抗:DC200V 20MΩ MIN.