
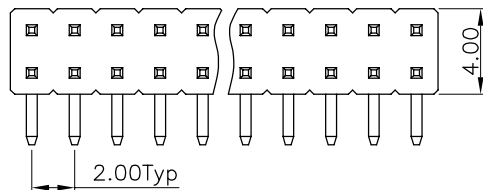
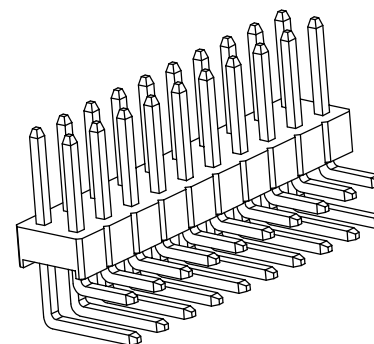

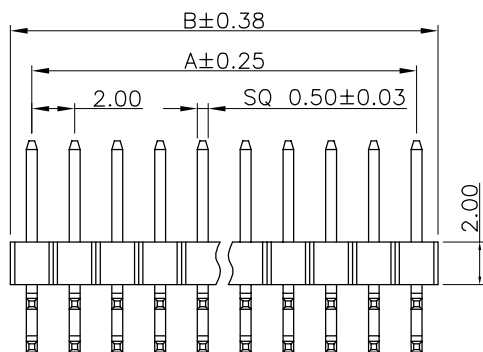


ROHS

RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.05)▲ Non-tooled parts
NO.OF POSITIONS DIM LIST:

CONTACTS	DIMENSIONS	
	A	B
4	2.00	4.00
6	4.00	6.00
8	6.00	8.00
10	8.00	10.00
12	10.00	12.00
14	12.00	14.00
16	14.00	16.00
18	16.00	18.00
20	18.00	20.00
22	20.00	22.00
24	22.00	24.00
26	24.00	26.00
28	26.00	28.00
30	28.00	30.00
32	30.00	32.00
34	32.00	34.00
36	34.00	36.00
38	36.00	38.00
40	38.00	40.00
42	40.00	42.00
44	42.00	44.00
46	44.00	46.00
48	46.00	48.00
50	48.00	50.00
52	50.00	52.00
54	52.00	54.00
56	54.00	56.00
58	56.00	58.00
60	58.00	60.00
62	60.00	62.00
64	62.00	64.00
66	64.00	66.00
68	66.00	68.00
70	68.00	70.00
72	70.00	72.00
74	72.00	74.00
76	74.00	76.00
78	76.00	78.00
80	78.00	80.00

Note:

1. Material:

1.1 Housing: PBT / PA6T .UL94V-0;
Color: Black

1.2 Contact Material:Brass

2. Electrical specifications

2.1 Rated current and voltage
2A 125V AC(r.m.s)2.2 Dielectric Withstanding Voltage
500V AC for one minute2.3 Contact Resistance
20mΩ Max2.4 Insulation Resistance
1000MΩ Min2.5 Operation Temperature
-40°C ~ +105°C

Pin Header

Pitch:5=2.00mm

Plastic Height:D=2.00mm

NO of Contacts: 4 to 80

Series No: G

Packing Options:

P=PE Y=Reel+Cap C=tube Z=Tube+Cap

Contact Plating:1:G/F

Insulator Material: B:PA6T

***** D\E\F LENGTH
(D)(E)(F)

DRAWING:

Frank

CHECKED:

Tony

APPROVAL:

Yang jie

GENERAL TOLERANCE

.X:=±0.30

.X':=±2°

.XX:=±0.20

.XX':=±1°

.XXX:=±0.10


.XXX':=±0.5°

UNIT: MM

PROJECTION:

SCALE: N/A

SHEET: 1/1

**CHIN-BAN**
electronics (H.K.) co., ltd

DESCRIPTION:

2.00mm Pitch Pin Header Double Row DIP90°

PART NO: P5DXXG-405028-B1P

REV: 1.0

CUSTOMER NO:

SIZE: A4